

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number
WO 01/19092 A1

- (51) International Patent Classification⁷: H04N 9/31 V., C.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
DE VAAN, Adrianus, J., S., M.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/EP00/07967
- (22) International Filing Date: 15 August 2000 (15.08.2000) (74) Agent: GROENENDAAL, Antonius, W., M.; Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (25) Filing Language: English
- (26) Publication Language: English (81) Designated State (national): JP.
- (30) Priority Data: 09/389,177 2 September 1999 (02.09.1999) US (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). Published:
— With international search report.
- (72) Inventors: STANTON, Douglas, A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). STROOMER, Martinus, For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF AND DEVICE FOR GENERATING AN IMAGE HAVING A DESIRED BRIGHTNESS

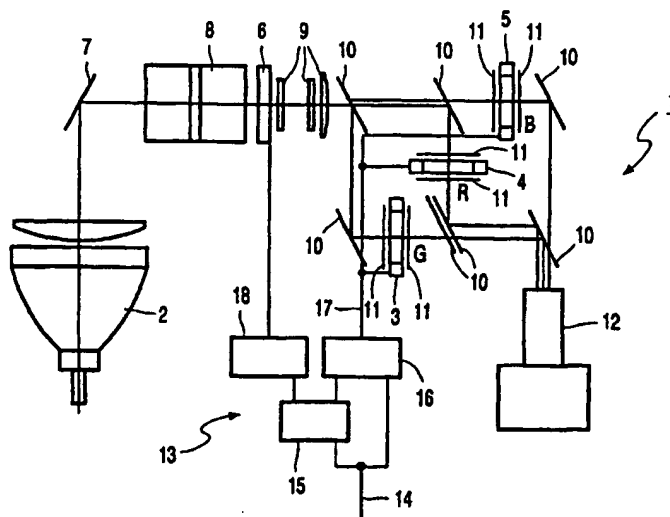

(57) Abstract: The present invention relates to a method of generating an image having a desired brightness, which image is generated by means of a device provided with at least one light source, at least one electro-optical light modulation panel and at least one light-control device. The light from the light source is converted into an image having a desired brightness via at least the electro-optical light modulation panel and the light-control device. The image to be projected is analyzed in a regulator, whereafter the electro-optical light modulation panel and the light-control device are driven, while a too bright image is generated by means of the electro-optical light modulation panel, which image is converted by means of the light-control device into an image having a desired brightness and a desired contrast.

WO 01/19092 A1

Method of and device for generating an image having a desired brightness.

The invention relates to a method of generating an image having a desired brightness, which image is generated by means of a device comprising at least one light source, at least one electro-optical light modulation panel and at least one light-control device, the light from the light source being converted into an image having a desired brightness via at least the electro-optical light modulation panel and the light-control device.

The invention also relates to a device which is suitable for generating an image having a desired brightness by means of such a method, which device comprises at least one light source, at least one electro-optical light modulation panel and at least one light-control device.

10

In such a method and device known from US-A-5,597,223, the light-control device comprises a diaphragm having an adjustable aperture. The device is applicable in a light or a dark ambience, with the aperture size being adjusted in dependence upon a light or a dark ambience, such that bright images or images which are rich in contrast are accentuated.

However, the aperture size is not optimized for each image. When, for example, an LCD is used as an electro-optical light modulation panel, the contrast in an image is directly dependent on the desired brightness of this image. When an image to be projected has a relatively low brightness, the LCD is driven accordingly. At a desired, relatively low brightness, the realized contrast is relatively low due to physical properties of the LCD. Consequently, the contrast that can be maximally realized with the LCD cannot be achieved at a desired, relatively low brightness.

It is an object of the invention to provide a method and a device with which a desired brightness and a desired contrast can be realized for each image.

In the method according to the invention, this object is achieved in that the image to be projected is analyzed in a regulator, whereafter the electro-optical light modulation panel and the light-control device are driven, and a too bright image is generated

by means of the electro-optical light modulation panel, which image is converted by means of the light-control device into an image having a desired brightness and a desired contrast.

By analyzing preferably each image prior to driving the electro-optical light modulation panel, the light modulation panel can be subsequently driven in such a way that a too bright image having a desired contrast is generated by means of this panel.
5 Simultaneously, the light-control device, which comprises, for example, a diaphragm or a light modulation panel, is driven in such a way that the image generated by means of the light modulation panel and the light-control device has both the desired contrast and the desired brightness.

10 In the device according to the invention, the object is achieved in that the device comprises a regulator for analyzing the image to be projected, driving the electro-optical light modulation panel for generating a too bright image, and driving the light-control device for converting the too bright image into an image having a desired brightness and a desired contrast.

15 By driving the light modulation panel as maximally as possible, a maximal brightness and thus a maximal contrast is obtained. The brightness is reduced to the desired level by means of the light-control device.

For an image having large dark areas and large highlights areas, the dark areas can be made perceptually darker by generating a too dark image by the panel, and converting
20 the image into one having the desired brightness and contrast by using the light control device to increase light from the light source.

An embodiment of the device according to the invention is characterized in that the device comprises at least two electro-optical light modulation panels and one light-control device, by means of which images generated on the light modulation panels are
25 simultaneously convertible.

Each light modulation panel is applicable for a different color of the images to be projected. Since each light modulation panel is associated with a light-control device, the light modulation panel can be optimally driven separately for each color by means of the
30 regulator.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings,

Fig. 1 shows a first embodiment of a device according to the invention,
Fig. 2 shows a second embodiment of a device according to the invention,
Fig. 3 shows a third embodiment of a device according to the invention, and
Fig. 4 shows a fourth embodiment of a device according to the invention
5 comprising one color single light modulation panel of the reflective type.

Corresponding components in the Figures are denoted by the same reference numerals.

10 Fig. 1 shows a device 1 according to the invention, comprising a light source 2, three electro-optical light modulation panels 3, 4, 5 with which a green G, a red R and a blue B part, respectively, of an image to be projected is realized, and a light-control device 6 arranged between the light source 2 and the light modulation panels 3-5. A folding mirror 7 and a PBS 8 (Polarizing Beam Splitter) are arranged between the light source 2 and the light-control device
15 6. The light-control device 6 may be a diaphragm, but in the embodiment shown here, the light-control device is provided with a twisted nematic cell having a polarizer at an exit side. Lenses 9, (dichroic) folding mirrors 10 and polarization filters 11 are arranged between the light-control device 6 and the light modulation panels 3-5. The lenses 9, (dichroic) folding mirrors 10 and filters 11 are known per se and will therefore not be described in greater detail.
20 The device 1 further comprises a projection lens 12. Filters 11 and (dichroic) folding mirrors 10 are also arranged between the light modulation panels 3-5 and the projection lens 12.

The device 1 further comprises a regulator 13. The regulator 13 has a video signal input 14 which is connected to a video signal analyzer 15 and to a video signal amplifier 16. The video signal analyzer 15 is also connected to the video signal amplifier 16. The video
25 signal amplifier 16 has a video signal line 17 which is also connected to the light modulation panels 3-5. The regulator 13 further comprises a drive module 18 which is arranged between the video signal analyzer 15 and the light-control device 6.

The operation of the device 1 will now be briefly elucidated. The video signal input 14 supplies the information about the images to be projected to the regulator 13. This
30 information is analyzed in the video signal analyzer 15, determining the desired brightness and the desired contrast of the complete image or of parts of the image. Subsequently, the video signal analyzer 15 drives the video signal amplifier 16 and the drive module 18 which in their turn drive the light modulation panels 3-5 and the light-control device 6, respectively.

The video signal amplifier 16 drives the light modulation panels 3-5 in such a way that, in the absence of the light-control device 6, an image would be obtained which would have a too high brightness. However, the contrast of such an image would have a desired value. The drive module 18 drives the light-control device 6 completely or for each
5 part of the image to be projected, such that the brightness of the projected image corresponds to the desired brightness. The regulator 13 is preferably based on statistic information relating to the amplitude range of the video signal.

Fig. 2 shows a device 20 according to the invention, comprising a light source 2, light modulation panels 3-5 and a projection lens 12. The device 20 further comprises lenses
10 9, (dichroic) folding mirrors 10, a PCS 21 and an integrator 22, arranged between the light source 2 and the light modulation panels 3-5. The device 20 further comprises a dichroic prism 23 arranged between the light modulation panels 3-5 and the projection lens 12. Moreover, the device 20 comprises three light-control devices 24 arranged on a side of the light modulation
15 panels 3-5 remote from the prism 23. The light-control devices 24 and the light modulation panels 3-5 can be driven by means of a regulator, such that, per color green G, red R and blue B, the associated light modulation panel 3-5 is driven in such a way that a too bright image having a desired contrast is obtained, which image is converted by means of the associated light-control devices 24 into an image having a desired brightness.

Fig. 3 shows a third embodiment of a device 30 according to the invention,
20 comprising a light source 2, reflective light modulation panels 3-5 and a projection lens 12. The device further comprises lenses 9, (dichroic) folding mirrors 10, a PCS 21, an integrator 22 and polarizing beam splitters 31, arranged between the light source 2 and the light modulation panels 3-5. The polarizing beam splitters 31 and the dichroic prism 23 are arranged between the light modulation panels 3-5 and the projection lens 12. The device 30
25 further comprises a liquid-crystal shutter 32 which can be controlled separately for each of the three colors and is arranged on a side of the projection lens 12 remote from the light modulation panels 3-5. Also in the device 30 shown in this embodiment, the light modulation panels 3-5 are driven at a brightness which is relatively too high, whereafter the desired brightness of the image to be projected is generated per color by means of the shutter 32
30 operating as a light-control device.

Although not mentioned in the description of Figures 1 and 2, both embodiments may be provided with an integrator arranged between the light source 2 and the PBS 8.

It is alternatively possible to use the method and the device in systems which are not provided with a projection lens 12.

Dependent on the desired quality of the images to be projected, the light-control device can influence the brightness of the image in its totality, or it can influence the
5 brightness of parts of the image to be projected. As smaller parts of the image can be influenced by the light-control device, a higher quality of the image to be projected can be realized.

It is alternatively possible to provide a light source drive unit as a light-control device, by means of which the brightness of the light source can be controlled per image.
10 Light sources which do not require a constant power level are, for example, Xenon arc lamps and LEDs.

All embodiments described up to now show a device comprising three light valves 3-5. However, it is possible to have a device comprising only one light modulation panel, monochrome or color. A color single light modulation panel can for example by
15 illuminated color sequentially by means of a color wheel, by scrolling bars or by means of three differently colored lamps. In case of a color wheel or three different light sources, the image can be influenced for each color independently. Namely, the segments in the color wheel or the time that each of the lamps is lit can be varied for each color. In case of scrolling bars, it is more difficult to influence the intensity of the colors in the image independently as
20 the panel is illuminated by two bars simultaneously.

When the device comprises three light modulation panels and one light source, independent control of the intensity of the colors in the image is not possible. When the intensity of the light source is changed, the three colors will be influenced simultaneously.

Another embodiment in which independent control for each color is possible is
25 shown in Figure 4.

Figure 4 shows an embodiment of a device 40 according to the invention comprising one single light modulation panel 42 of the reflective type. Said panel can be for example a reflective LCD-panel or a DMD-panel. Image information to be projected is provided from a video source 44 via projector electronics 46 to the panel 42, on the one hand,
30 and to a light source controlling device 48, on the other hand, for synchronization. The light source comprises three different lamps 50, 52 and 54, one for each primary color. The light source controlling device 48 is connected to a programmable power supply 56, 58, 60 for the lamps 50, 52 and 54. Via lenses 62 and a prism illuminator 64, the light from the light source is incident on the light valve 42. The prism illumination 42 may be a PBS in case the light

valve is an LCD panel and may be a prism based on TIR in case the light valve is a DMD. After modulation by the light valve 42, the light to be projected reaches the projection lens 68. By flashing each of the lamps in a time interval of, for example 16 ms, as is indicated in the inset, and by varying the time interval for the individual lamps, the colors can be varied

5 independently in the image to be projected. The video data to be projected for each color are field sequentially provided to the light modulation panel.

CLAIMS:

1. A method of generating an image having a desired brightness, which image is generated by means of a device comprising at least one light source, at least one electro-optical light modulation panel and at least one light-control device, the light from the light source being converted into an image having a desired brightness via at least the electro-optical light modulation panel and the light-control device, characterized in that the image to be projected is analyzed in a regulator, whereafter the electro-optical light modulation panel and the light-control device are driven, and a too bright image is generated by means of the electro-optical light modulation panel, which image is converted by means of the light-control device into an image having a desired brightness and a desired contrast.
2. A device which is suitable for generating an image having a desired brightness by means of the method as claimed in claim 1, which device comprises at least one light source, at least one electro-optical light modulation panel and at least one light-control device, characterized in that the device comprises a regulator for analyzing the image to be projected, driving the electro-optical light modulation panel for generating a too bright image, and driving the light-control device for converting the too bright image into an image having a desired brightness and a desired contrast.
3. A device as claimed in claim 2, characterized in that the device comprises at least two electro-optical light modulation panels and one light-control device, by means of which images generated on the light modulation panels are simultaneously convertible.
4. A device as claimed in claim 2, characterized in that the device comprises a plurality of electro-optical light modulation panels and at least a corresponding plurality of light-control devices, each light modulation panel being associated with a cooperating light-control device, by means of which the image generated on the associated light modulation panel is convertible.

5. A device as claimed in any one of the preceding claims 2-4, characterized in that the light-control device comprises an electro-optical light modulation panel.
6. A device as claimed in any one of the preceding claims 2-5, characterized in that the light-control device comprises a three-color shutter.
7. A device as claimed in any one of the preceding claims, characterized in that the brightness of the light source is adjustable per image.
- 10 8. A device as claimed in any one of the preceding claims, characterized in that the light-control device comprises a light source drive unit.

2/3

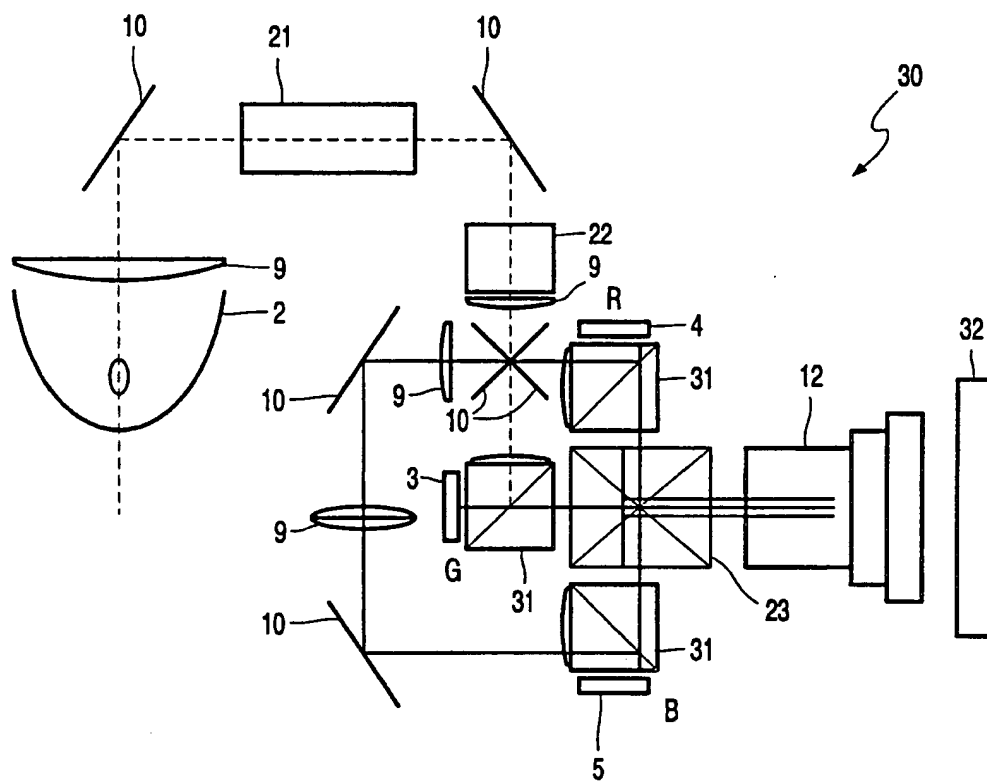


FIG. 3

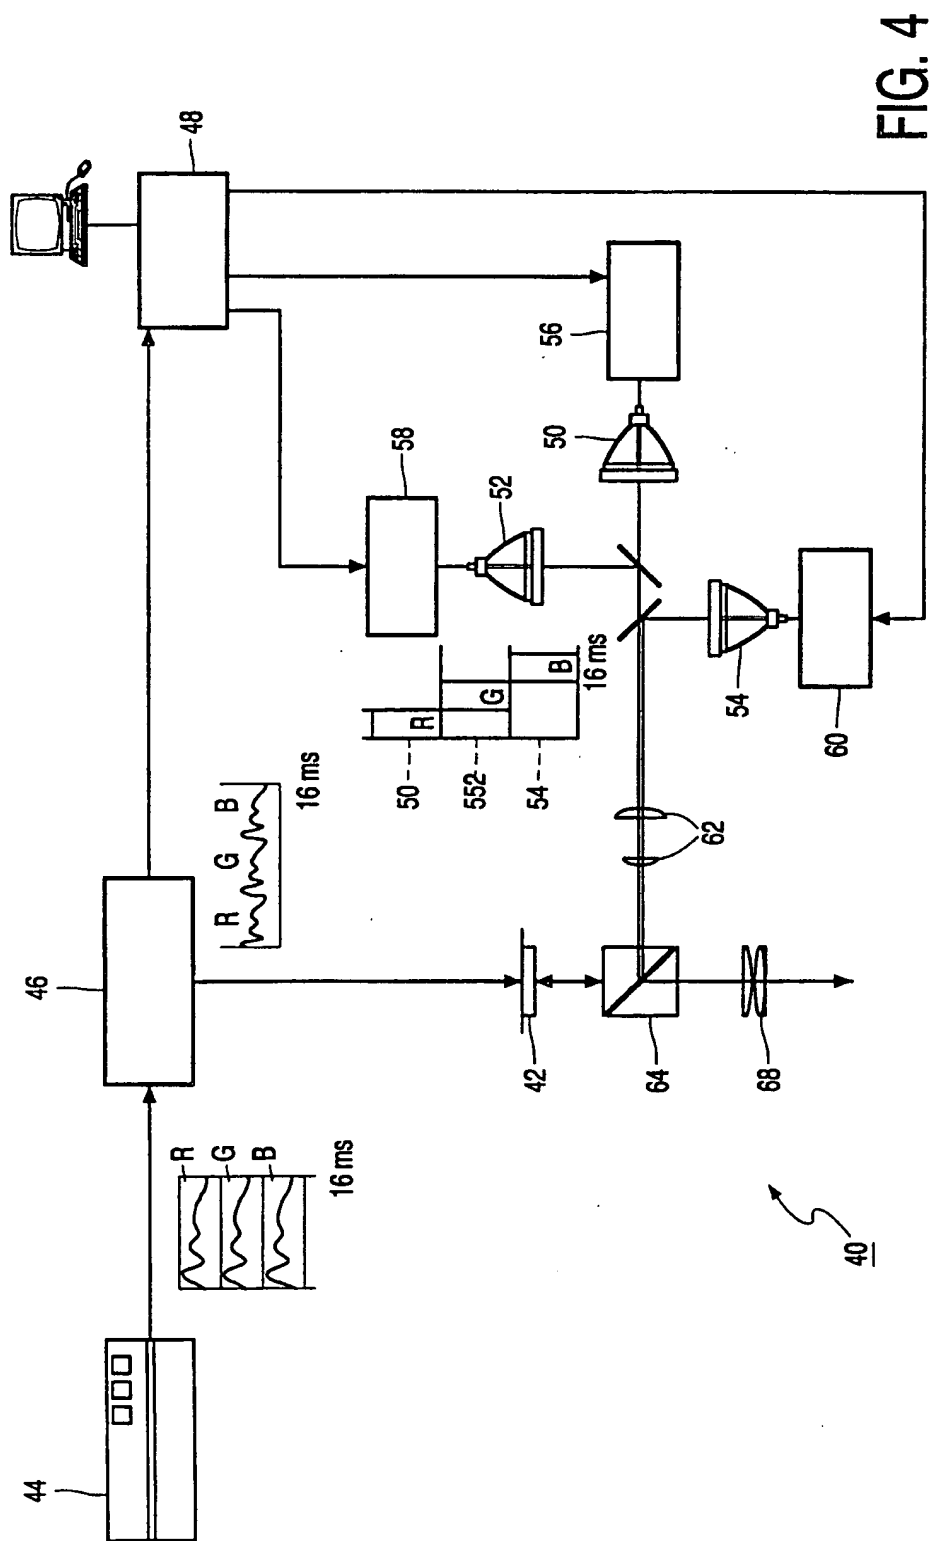


FIG. 4

INTERNATIONAL SEARCH REPORT

Inter. nal Application No
PCT/EP 00/07967

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N9/31

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 924 783 A (JONES PHILIP J) 20 July 1999 (1999-07-20) the whole document	1-4
A	US 5 622 418 A (DAIJOGO AKIRA ET AL) 22 April 1997 (1997-04-22) column 12, line 7 - line 63	1-4
A	US 5 597 223 A (WATANABE YOSHIHIRO ET AL) 28 January 1997 (1997-01-28) cited in the application column 14, line 32 -column 15, line 45 column 30, line 53 -column 31, line 40	1-4
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

20 November 2000

Date of mailing of the international search report

27/11/2000

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Pigniez, T

INTERNATIONAL SEARCH REPORT

Inter. nal Application No

PCT/EP 00/07967

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PATENT ABSTRACTS OF JAPAN vol. 017, no. 611 (P-1641), 10 November 1993 (1993-11-10) & JP 05 188345 A (MITSUBISHI ELECTRIC CORP), 30 July 1993 (1993-07-30) abstract</p> <p style="text-align: center;">---</p>	1-4
A	<p>PATENT ABSTRACTS OF JAPAN vol. 017, no. 098 (P-1494), 26 February 1993 (1993-02-26) & JP 04 291333 A (SEIKO EPSON CORP), 15 October 1992 (1992-10-15) abstract</p> <p style="text-align: center;">---</p>	1-4
A	<p>US 5 379 083 A (TOMITA AKIRA) 3 January 1995 (1995-01-03) column 2, line 43 -column 3, line 22</p> <p style="text-align: center;">-----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/07967

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5924783 A	20-07-1999	WO 9905863 A	04-02-1999
US 5622418 A	22-04-1997	JP 7270719 A	20-10-1995
		JP 8114779 A	07-05-1996
		JP 8114857 A	07-05-1996
		JP 8166571 A	25-06-1996
		US 5760875 A	02-06-1998
		US 6033091 A	07-03-2000
US 5597223 A	28-01-1997	JP 8106090 A	23-04-1996
		KR 163077 B	15-01-1999
		US 5519518 A	21-05-1996
JP 05188345 A	30-07-1993	JP 3019574 B	13-03-2000
JP 04291333 A	15-10-1992	JP 2953084 B	27-09-1999
US 5379083 A	03-01-1995	CA 2182780 A	17-08-1995
		EP 0745234 A	04-12-1996
		JP 10500221 T	06-01-1998
		WO 9522081 A	17-08-1995